





## Mac OS X DIAL UP CONFIGURATION FOR NETDIAL USERS

To configure Mac OS X for dial up access, choose System Preferences from the Apple menu and follow the instructions outlined below.

1. From the **Apple** menu, choose **System Preferences**.

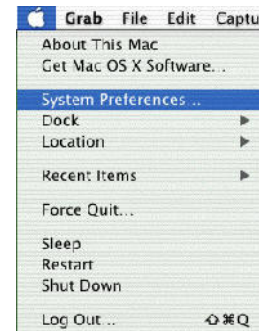


2. Click the **Network** icon.

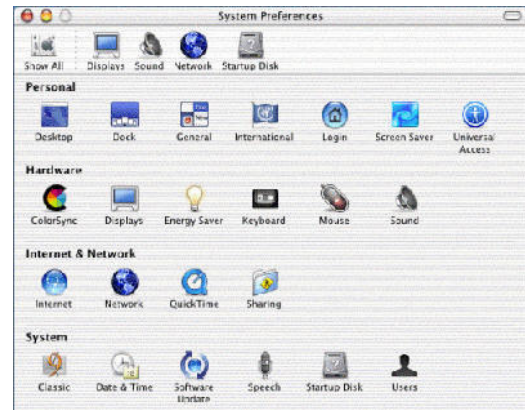


3. Click the arrow box on the **Show** pop-up list and choose **Internal Modem**.
  - a. Click on the **TCP/IP** tab.
  - b. Click the arrow box on the **Configure** pop-up list and choose **Using PPP**.
  - c. In the **Domain Name Servers** box, type the DNS server addresses for your domain. For Caribe.Net users, enter: 209.91.196.2, 209.91.199.6
  - d. In the **Search Domains** box, type your domain (i.e. caribe.net)




4. Click on the **PPP** tab.
  - a. In the Service Provider type, Caribe.Net
  - b. In the **Telephone Number** field, type the Caribe.Net dialup number local to you. A list of numbers is available at [www.caribe.net](http://www.caribe.net), or you can contact Technical Support at 787-728-9790.
  - c. In the **Account Name** field, type username.
  - d. In the **Password** field, type your password.
  - e. Check the box next to **Save password**.
  - f. Click the **PPP Options** button

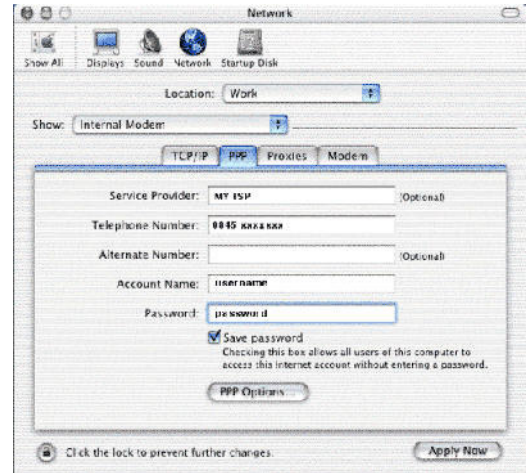


5. In this window, enter the following:
  - a. Check the box next to **Connect automatically when starting TCP/IP applications**.
  - b. Uncheck the box next to **Prompt to stay connected**.
  - c. Uncheck the box next to **Disconnect if idle**.
  - d. Check the box next to **Disconnect when user logs out**.
  - e. Click the **OK** button.

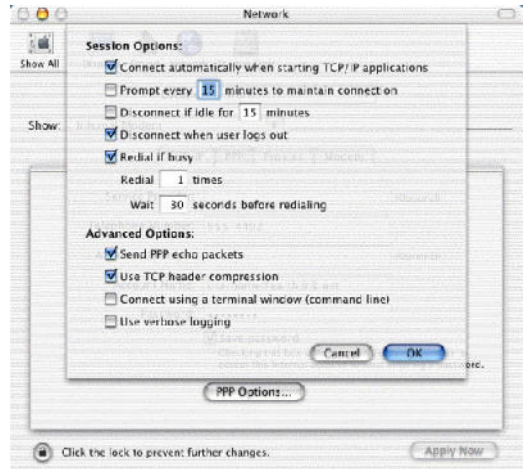

6. Click on the **Proxies** tab and uncheck all the boxes.

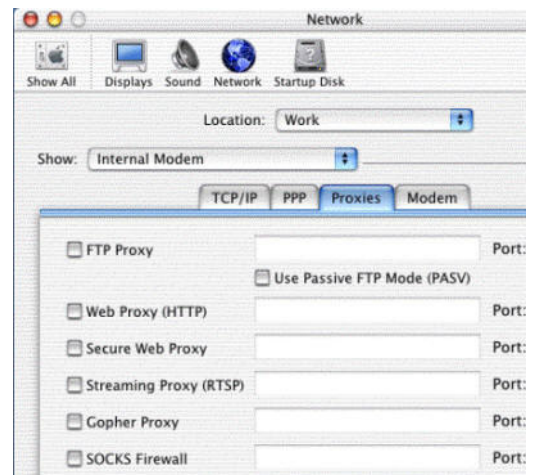

7. Click on the **Modem** tab.
  - a. Click the arrow box on the **Modem** pop-up list and choose **Apple Internal 56K Modem (v.90)**.
  - b. Click the **Tone** radio button in the **Dialling** area.
  - c. Check the box next to **Show modem status in menu bar**.
  - d. Click the **Apply Now** button.

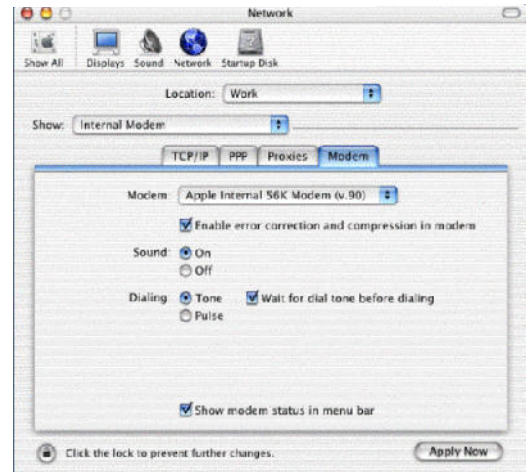

8. Close the **Network** window.

You have now configured Mac OS X for dial up access with Caribe.Net!